

## Oxygen generator

Elektravägen 53  
SE-126 30 Hägersten, Sweden  
+46 10 252 30 00  
www.ozonetech.com

# AS-P

Alpha-Series Oxygen Generators produce from 0.56 to 141.58 m<sup>3</sup> (20 to 5,000 ft<sup>3</sup>) of oxygen per hour at up to 95.5% oxygen concentration.

When electricity and a source of compressed air is supplied, these dependable machines can provide oxygen for any application.



## Specification

Product characteristics	
Product flow	52.58-60.46 Nm <sup>3</sup> /h or 943-1 085 LPM (2,000-2,300 SCFH) <sup>1</sup>
Product pressure	310-448 kPa (45-65 psig) <sup>1</sup>
Product concentration (nominal)	93%
Product dew point	-73 °C (-100 °F)
Dimensions (W x D x H) (nominal)	216 x 163 x 282 cm (85 x 64 x 111 in)
Weight	2,835 kg (6,250 lb)
Physical connections <sup>2</sup>	
Compressed air inlet	1½" FNPT
Product gas outlet	¾" FNPT
Ambient operating conditions	
	Locate the oxygen generator in a well ventilated area that is protected from weather elements and remains between 4 °C (40 °F) and 40 °C (104 °F)
Feed air requirements	
	Flow rate: refer to chart on next page. Clean and dry "Plant Air" (Class 5.6.5 per ISO 8573.1) Pressure: 621 kPa (90 psig) minimum Temperature: 50 °C (122 °F) maximum
Control power requirements (single phase)	
	120 V ~ ±10%, 50/60 Hz, 3.0 A or 220 V ~ ±10%, 50/60 Hz, 1.0 A



© Ozonetech

**ozonetech.**  
a MELLIFIQ brand

# Oxygen generator

## Specification

2,498 Liters/660 gallon oxygen receiver characteristics	
Dimensions (Dia. x H)	125 x 328 cm (49 x 129 in)
Weight	590 kg (1,300 lb)

<sup>1</sup> Nm<sup>3</sup> (Normal cubic meter) gas measured at 1 atmosphere and 0 °C / SCF (Standard cubic foot) gas measured at 1 atmosphere and 70 °F.

<sup>2</sup> Hose and applicable adapters included with optional Factory-supplied accessory kits.

## Typical applications

### Medical

- Hospital systems

### Manufacturing

- Thermal/chemical oxidation
- Brazing/soldering/cutting

### Environmental

- Ozone (generator) feed gas
- Environmental remediation
- Waste/water treatment

### Glass industry

- Glass work/manufacturing/blowing

### Additional

- Fish farming

## Features

- Produces oxygen from an independent compressed air source
- Optional NEMA 4 touchscreen control panel with integrated oxygen concentration monitor
- Microprocessor controlled
- Low operating cost
- Automatic and unattended operation
- Easy to install and maintain

Elektravägen 53  
SE-126 30 Hägersten, Sweden  
+46 10 252 30 00  
[www.ozonotech.com](http://www.ozonotech.com)



© Ozonotech

**ozonotech.**  
a MELLIFIQ brand

# Oxygen generator

## Ordering information

Model	Part number	Description
AS-P	AS093-1	120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-2	220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-3	With NEMA 4 pressure switch, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-4	With NEMA 4 pressure switch, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-7	With HMI NEMA 4 touchscreen and oxygen concentration monitor, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-8	With HMI NEMA 4 touchscreen and oxygen concentration monitor, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-10	With NEMA 4 pressure switch/local remote ON/OFF, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-11	With NEMA 4 pressure switch/local remote ON/OFF, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-12	With oxygen concentration monitor (LED indicator), 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-13	With oxygen concentration monitor (LED indicator), 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
Accessories	TA079-1	2 498 Liters/660 gallon oxygen receiver
<b>Shipping information</b>	<b>AS-P</b>	<b>2 498 Liters/660 gallon oxygen receiver</b>
Class	92.5	70
Commodity classification number	8421.39.8040	7311.00.0000
Dimensions (W x D x H)	224 x 290 x 183 cm (88 x 114 x 72 in) with filter and pallet	112 x 335 x 127 cm (44 x 132 x 50 in)
Gross weight	3,044 kg (6,710 lb) with filter and pallet	680 kg (1,500 lb)

<sup>1</sup> Specify oxygen flow and pressure at time of order.

An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator. All performance ratings based on an ambient temperature up to 38 °C (100 °F), up to 304.8 meters (1,000 feet) elevation, and 80% relative humidity.


Elektravägen 53  
SE-126 30 Hägersten, Sweden  
+46 10 252 30 00  
[www.ozonotech.com](http://www.ozonotech.com)




© Ozonotech

**ozonotech.**  
a MELLIFIQ brand

# Oxygen generator

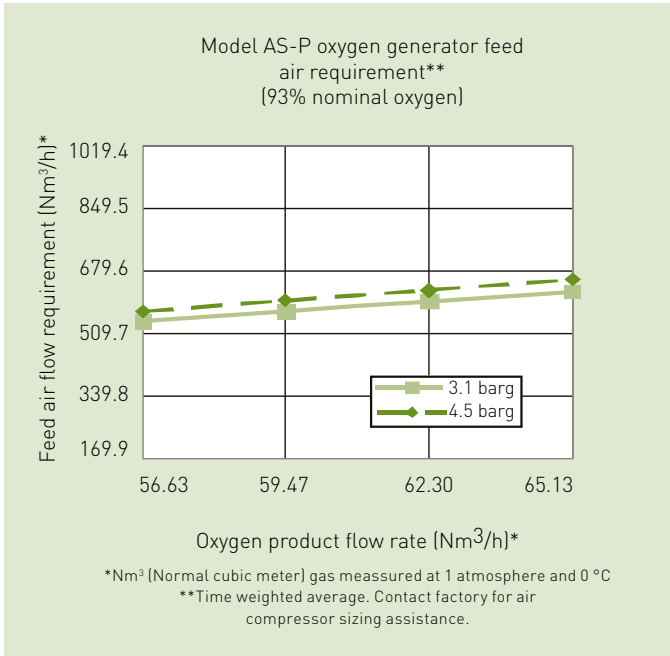

Note: All dimensions are nominal

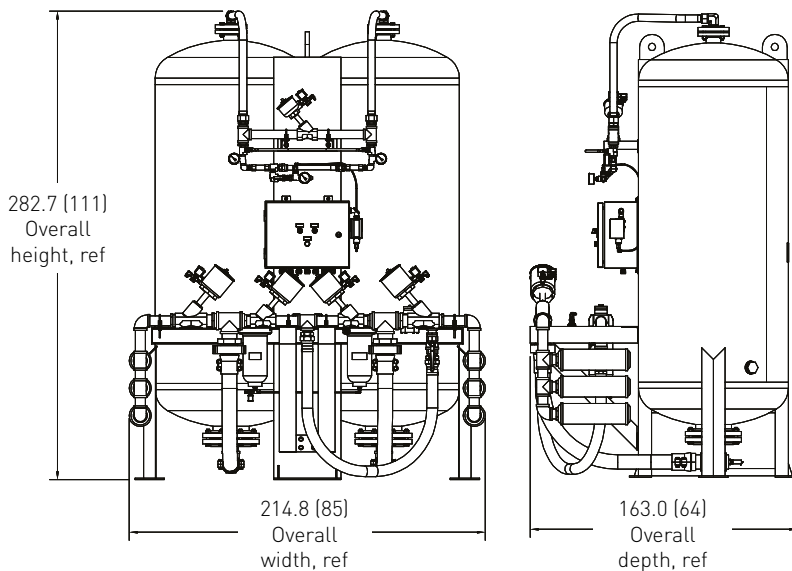

Elektravägen 53  
 SE-126 30 Hägersten, Sweden  
 +46 10 252 30 00  
 www.ozonotech.com



© Ozonotech

**ozonotech.**  
 a MELLIFIQ brand